

HP Easy Firmware Upgrade Utility

Many later HP printer models that start with an “P”, ”M”, “CP” or “CM” will have an *HP Easy Firmware Upgrade Utility* that can be downloaded and ran from a computer that has the printer installed to easily upgrade firmware.


If this feature is not available, visit the links below for other instructions:

- HP Legacy Firmware upgrade instructions: <https://www.laserpros.com/medias/hp-performing-legacy-firmware-upgrade.pdf>
- HP FutureSmart Firmware upgrade instructions: <https://www.laserpros.com/medias/hp-future-smart-firmware-upgrade.pdf>


Instructions:

Link to video walkthrough: <https://youtu.be/PD20Lh1C7eM>

1. Go to <https://www.hp.com/> from a computer with the printer driver installed
2. Under the *Support* tab in the navigation and click *Software & drivers*

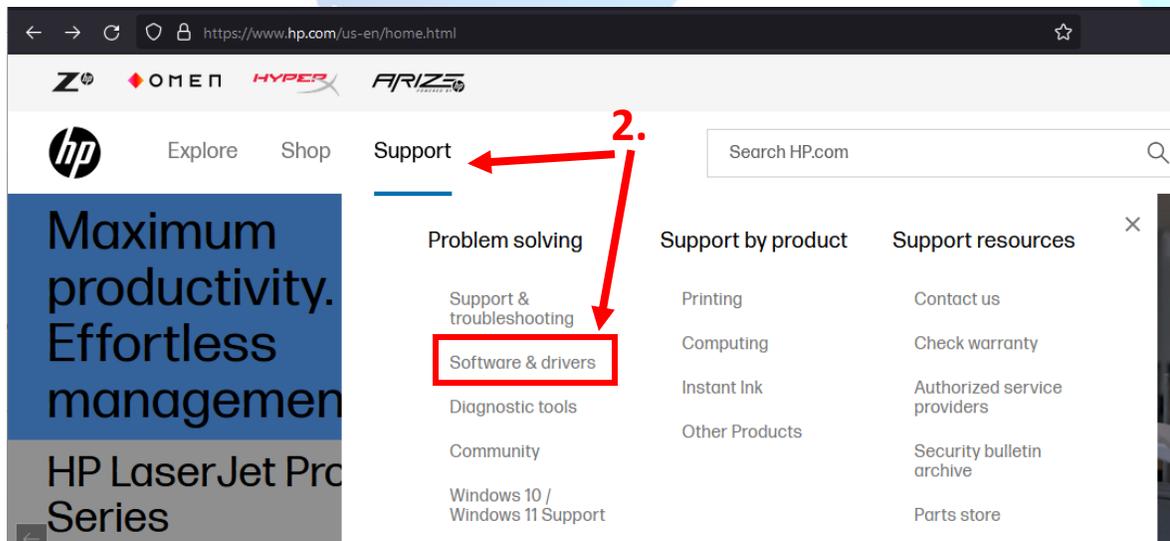


3. Click the *Printers* icon

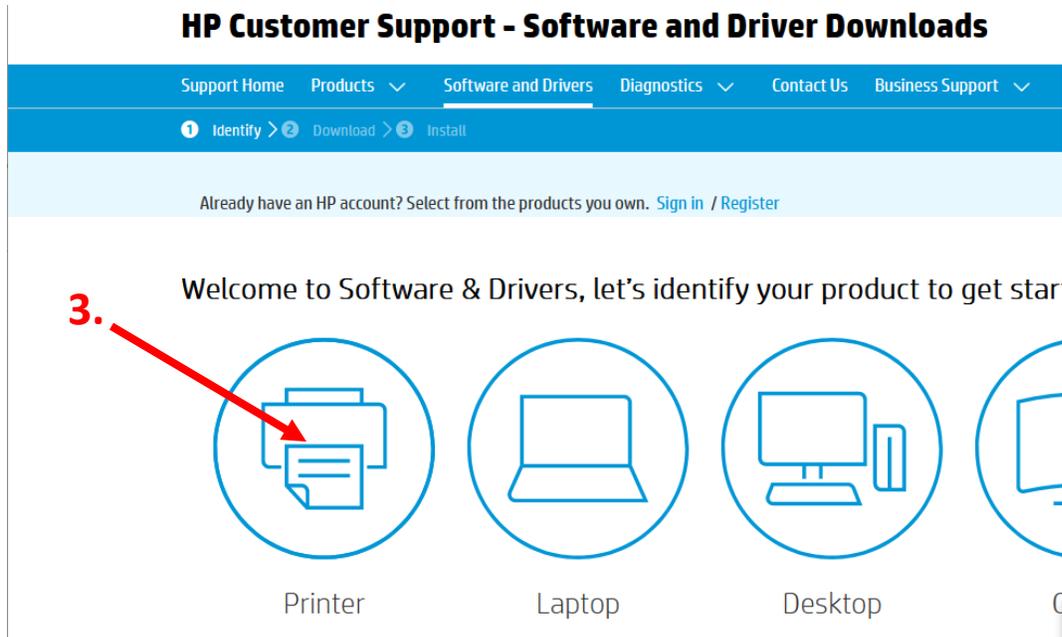

4. Enter your HP product name into the text box

HP Customer Support - Software and Driver Downloads

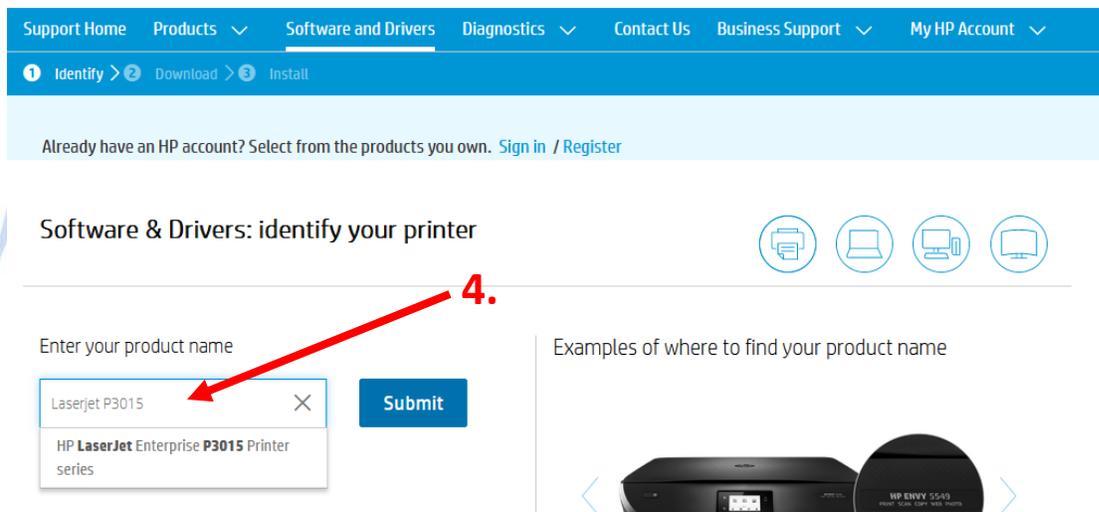

5. Expand the *Firmware* section to locate and download the *HP Easy Firmware Upgrade Utility* driver


All drivers

Open all	Version	File size	Release date	
<input type="checkbox"/> Driver-Universal Print Driver (3)				
<input type="checkbox"/> Driver-Universal Print Driver for Managed Services (2)				
<input type="checkbox"/> Driver-USB (1)				
<input checked="" type="checkbox"/> Firmware (3)				
▶ HP LaserJet P3015 Series Printer README	07.250.2	0.5 MB	Jan 6, 2017	Download
▶ HP LaserJet P3015 Series HP Easy Firmware Upgrade Utility (Includes Code Signing) for Windows Operating Systems	07.250.2	39.4 MB	Jan 6, 2017	Download
▶ HP LaserJet P3015 Series Printer Firmware (Includes Code Signing)	07.250.2	32.8 MB	Jan 6, 2017	Download

6. Once the download is complete, open and run the executable file

www.LaserPros.com

7. From the *Select Printer to Update* dropdown, select the printer to be upgraded.
8. Press *Send Firmware* button

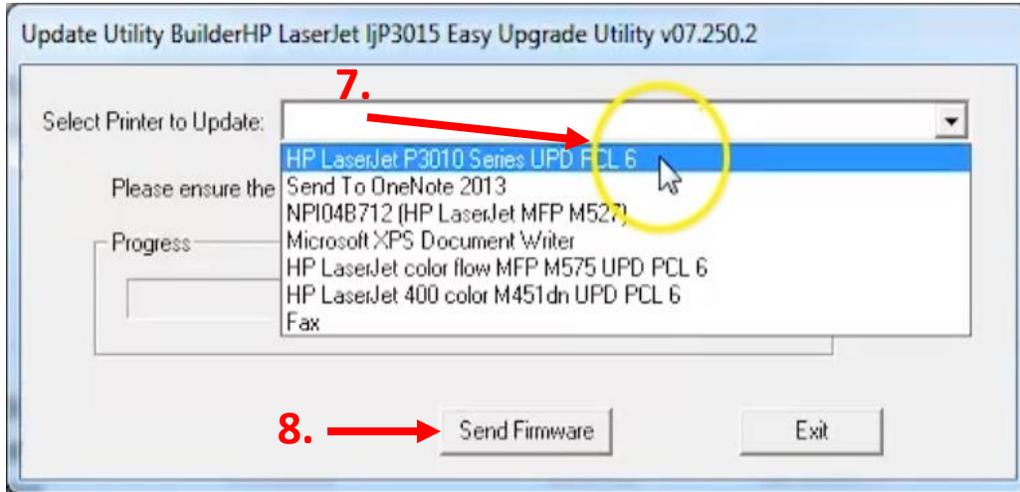

9. Check the control panel on the printer to confirm the upgrade is in progress, as there is no cross communication on this progress screen.

